

MIG-CL9000 series LED Video Wall Controller

Overview

MIG-CL9000 series is a powerful video wall controller, it is the central processor device for big screen splicing system, to achieve different formats input sources to be displayed in multiple display terminals, functions include arbitrary splice, zooming, windows, overlap, etc.

It adopts high speed FPGA and number bus matrix as the basic hardware structure, and has laid a stable advantage, at the same time it adopts RGB 24 BIT/60Hz real time processing internally, ensuring signal high reduction performance; the internal high performance zooming engine supports multi-screen output seamless splicing, ensuring output image clear, smooth, no delay. Depth module design supports AV, VGA, DVI, HDMI, SDI, IP, DP(4K) inputs, to achieve input signal EDID management. Output customized resolution is for all kinds of LED pixel to pixel splicing display. All series products are equipped with after sales support module, supporting USB upgrade and network, RS232 serial port control, convenient for technical support and after sales maintenance. System configuration is flexible, the input and output is available for different choices, currently 3U,4U,8U cabinets are for choosing.

MIG-CL9000 series is widely used in multi-media conference hall, multi-function room, directing and dispatching center, inspection center, theater, television studio, exhibition hall in government, traffic, hydropower, medicare, education, radio and television, malls and various industries.



Main Features

Pure hardware build-ups	4K×2K Input	Customized Output Resolution
4 separated layers per output	Real Time Seamless Switching	Input/Output Monitoring
Over 8 times scaling	Layer Grouping	High Definition Background of Pixel to Pixel Display
Splice LED Wall of Different Pixel Pitch	Layer Seamless Switching	Dual Power Supply Backup
Internal 24 bit RGB processing	9 Window Output per Channel	Operation's Real Time Monitoring
60Hz Real Time Processing	Easy Change for the Window's Size and Position	Real Time IP Monitoring
Input EDID	Full Screen Roaming	Projector Edge Blending Splicing


Operating Modes

3 control modes includes computer host control , Ipad control , and key control
 Computer host control : Achieved by connecting the machine with a computer via network cable or RS232 cable. Any operation will be done through the host software.


Ipad control : Achieved by the software designed for Ipad.

Key control: To control and select all the template manually.

Operating Interface

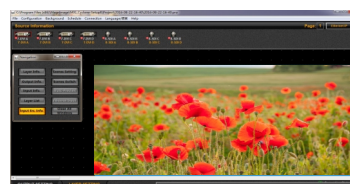


Computer Host interface



Ipad interface

Front And Rear Panel Introduction


MIG-CL9003

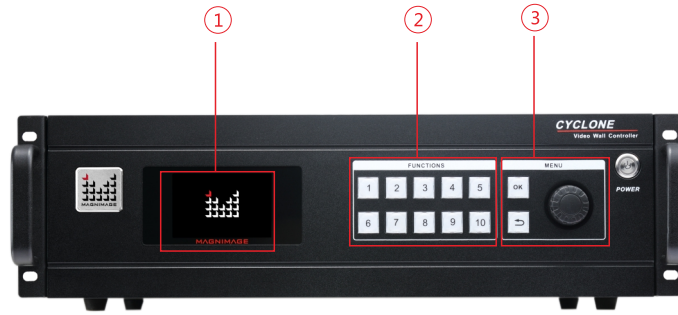

1--LCD Screen:
display the machine's status information, including input/output board, hardware version, temperature, network setting, etc.

2--Functions Button:
Button 1-10 are for machine's setting like IP, subnet mask, mode shifting.

3--Menu Operation:
"OK", "↵" and the Rotate key are used to read the menu on the LCD screen.

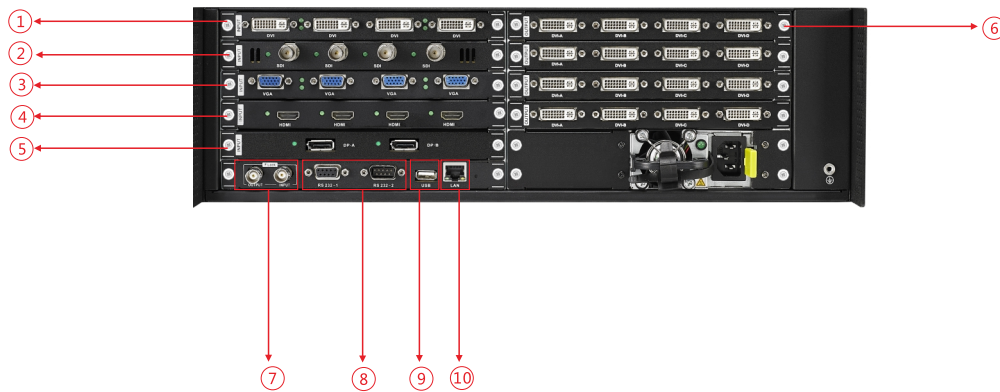


1--4×DVI inputs
2--4×SDI inputs

3--4×VGA inputs
4--4×HDMI inputs

5--2×DP inputs
6--4×DVI outputs

7--Frame lock plugs
8--RS 232 Control Port


9--USB Upgrade Port
10--LAN

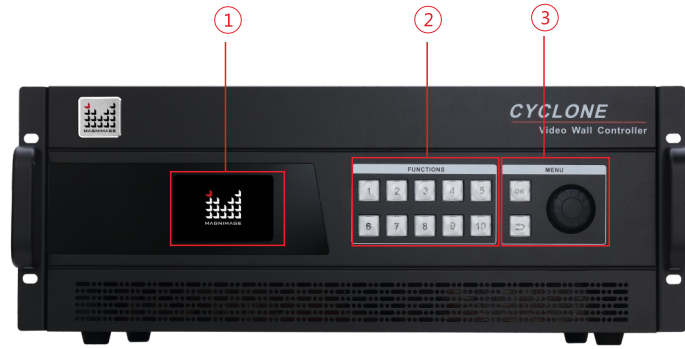


1--LCD Screen:
display the machine's status information, including input/output board, hardware version, temperature, network setting, etc.

2--Functions Button:
Button 1-10 are for machine's setting like IP, subnet mask, mode shifting.

3--Menu Operation:
"OK", "↵" and the Rotate key are used to read the menu on the LCD screen.

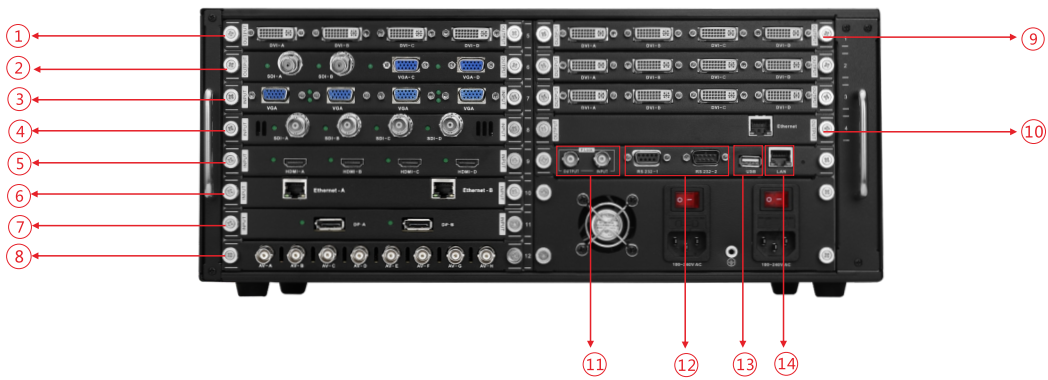


- | | | | | |
|--------------------------------|---------------------|------------------|-------------------------|----------------------|
| 1--4×DVI inputs | 4--4×SDI inputs | 7--2×DP inputs | 10--IP monitoring | 13--USB Upgrade Port |
| 2--2×SDI inputs , 2×VGA inputs | 5--4×HDMI inputs | 8--8×AV inputs | 11--Frame lock plugs | 14--LAN |
| 3--4×VGA inputs | 6--2×network inputs | 9--4×DVI outputs | 12--RS 232 Control Port | |

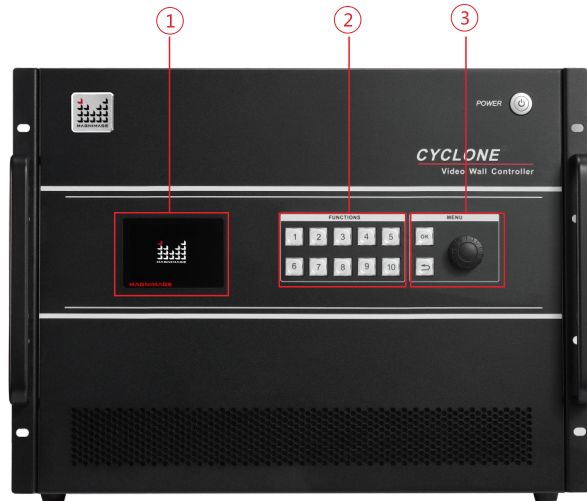

1--LCD Screen:
display the machine's status information, including input/output board, hardware version, temperature, network setting, etc.

2--Functions Button:
Button 1-10 are for machine's setting like IP, subnet mask, mode shifting.

3--Menu Operation:
"OK", "↵" and the Rotate key are used to read the menu on the LCD screen.

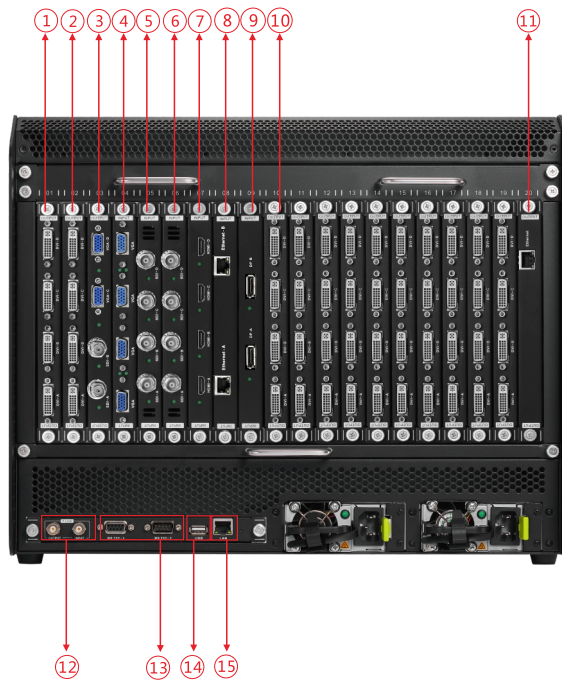

1--4×DVI inputs
2--4×DVI inputs
3--2×SDI inputs、2×VGA inputs


4--4×VGA inputs
5--4×SDI inputs
6--4×SDI inputs

7--4×HDMI inputs
8--2×IP monitoring
9--2×DP inputs

10--4×DVI outputs
11--IP monitoring
12--Frame lock plugs

13--RS 232 Control Port
14--USB Upgrade Port
15--LAN


High resolution LED wall splicing

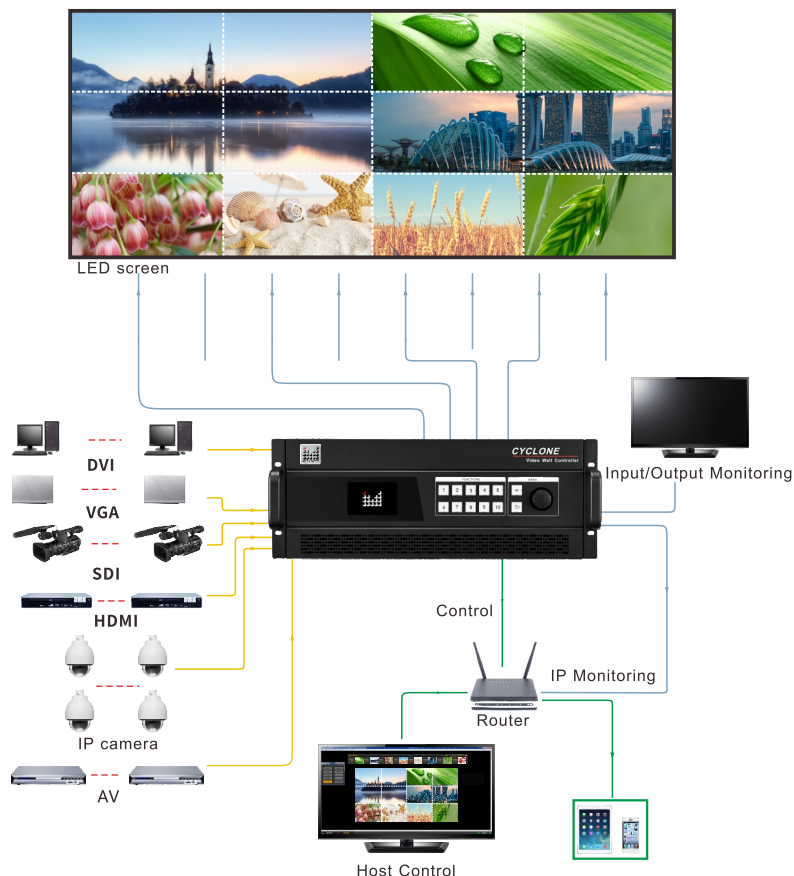

High resolution LED wall splicing

High resolution LED Wall splicing will be realized with corresponding sending cards and the machine's output customization. One 4U chassis machine supports 32 times splicing at most. One 3U chassis machine supports 16 times splicing at most. No frame drop and image tear. Supports 4Kx2K DP input and high resolution pixel-to-pixel display.


IP Monitoring

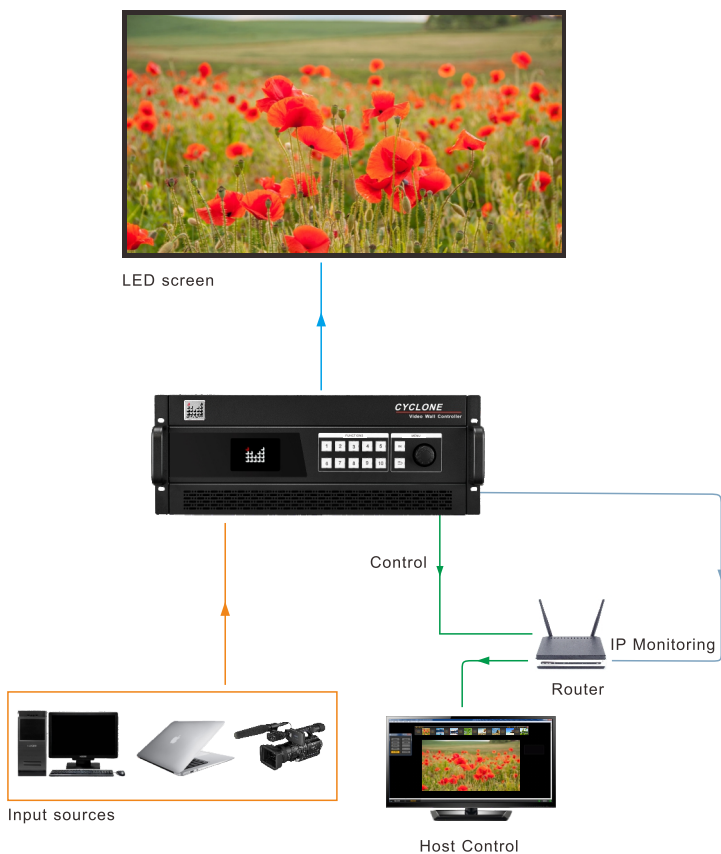

IP Monitoring

By connecting the network control port, the IP monitor and the host computer into one local area network, it is able to monitor all the input and output by the host software.


4 independent layers output by single channel

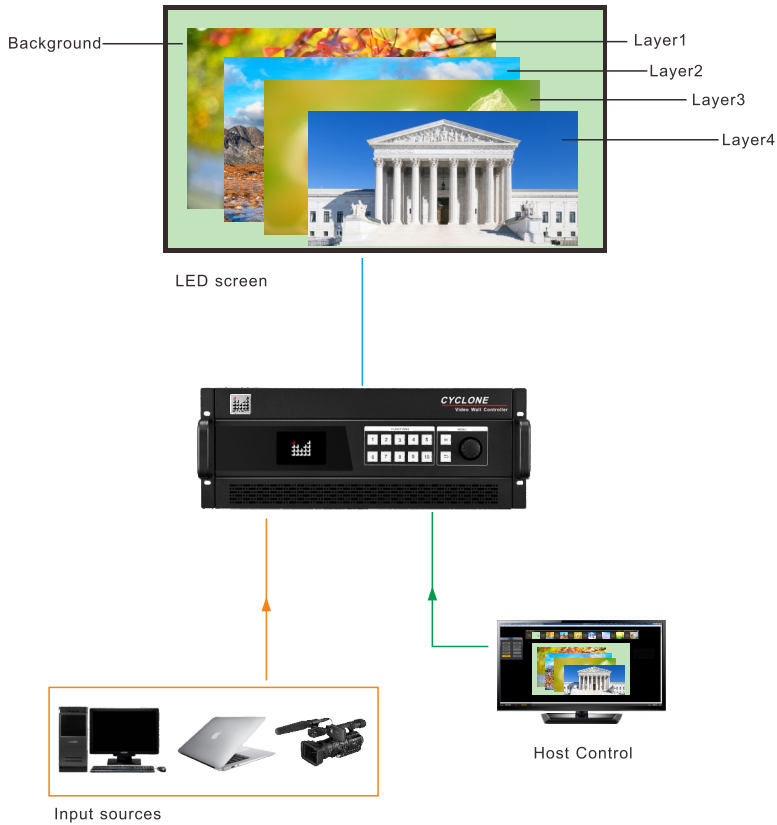

4 independent layers output by single channel

One DVI output channel is able to display 4 independent layers and one high definition background. The position, size and order of each layer can be set freely. Input source of any layer can also be set freely with the machine's inner video matrix.

Projector edge blending splicing

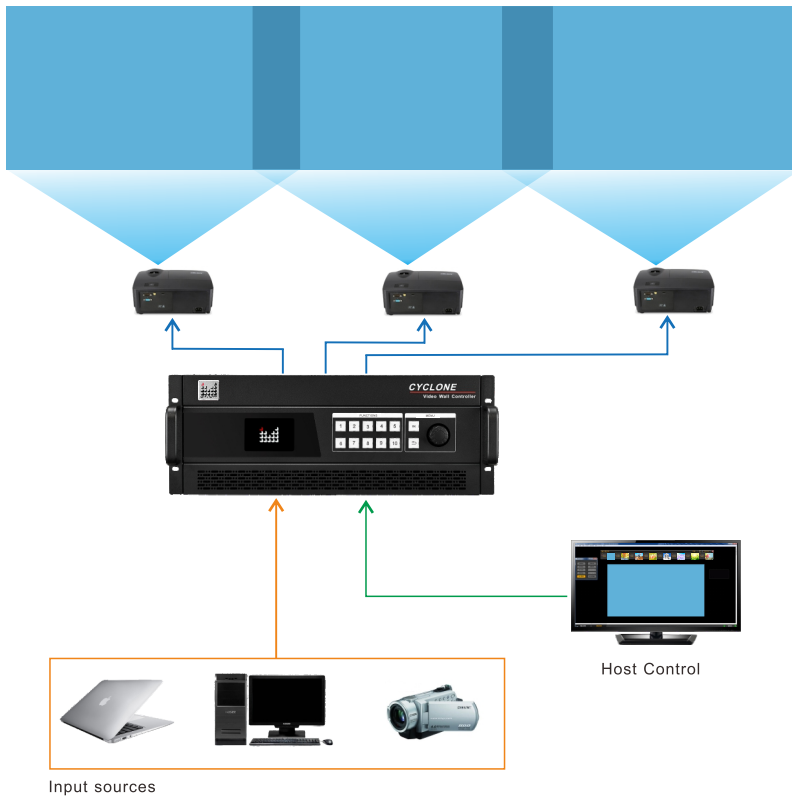

Projector edge blending splicing

One 4U case controller supports 32 projectors splicing at most; one 3U case controller supports 16 projectors splicing at most. Size, position and other parameters of the blending part can be changed via edge blending function.

Technical Specifications

Input board type and specification

Input Board Type	Ports	NO.	Specification
MIG-CL9000-INAV	AV	8	PAL, NTSC, SECAM
MIG-CL9000-INVGA	VGA	4	VESA
MIG-CL9000-INDVI	DVI	4	VESA, support EDID
MIG-CL9000-INDP	DP	2	DP 1.2 3840×2160/30 Hz
MIG-CL9000-INHDMI	HDMI	4	HDMI-1.3
MIG-CL9000-INSDI	SDI	4	480i, 576i, 720p, 1080i/p(3G SDI)
MIG-CL9000-INIP	IP	2	H.264
MIG-CL9000-INSDIVGA	SDI, VGA	SDI×2, VGA×2	SDI support 480i, 576i, 720p, 1080i/p(3G SDI) VGA support VESA

Output board type and specification

Output board type	Ports	NO.	Specification
MIG-CL9000-OUTDVI-A	DVI	2×2	1024×768/60Hz 1366×768/60Hz 1440×900/60Hz 1440×1440/60Hz 1280×1024/60Hz 1680×1050/60Hz
MIG-CL9000-OUTDVI-B	DVI	4×1	1600×1200/60Hz 1920×1080/60Hz 2560×816/60Hz Maximum customized horizontal output resolution: 2560 Maximum customized vertical output resolution: 2560
MIG-CL9000-OUTIP	IP	1	Real time IP monitoring

MIG-CL9003 chassis specification (No IP monitoring in 3U chassis)



Chassis Type	Input slots quantity	Output slots quantity	Control board quantity
MIG-CL9003-A	5	4	1
Power supply	100-240V AC 50/60Hz		
Power consumption	Maximum 180W		
Operation temperature	0~45°C		
Product dimension (L x W x H)	482.6×371.0×133.0mm		
N.W.	9.6kg		

Including Accessories

Provided accessories :

- Power Cable ×1
- User Manual ×1
- DVI Cable ×2
- USB Memory ×1
- Cable ×2
- Certificate ×1

MIG-CL9004 chassis specification



Chassis Type	Input slots quantity	Output slots quantity	Control board quantity
MIG-CL9004-A	8	4	1
MIG-CL9004-B	6	6	1
MIG-CL9004-C	4	8	1
Power supply	100-240V AC 50/60Hz		
Power consumption	Maximum 180W		
Operation temperature	0~45°C		
Product dimension (L x W x H)	482.6×371.0×177.0mm		
N.W.	11kg		

Including Accessories

Provided accessories :

User Manual ×1	Router ×1
DVI Cable ×2	VGA Cable ×1
LAN ×2	Power Cable ×2
USB Memory ×1	Certificate ×1

MIG-CL9008 chassis specification (AV input board is not accepted in 8U chassis)



Chassis Type	Input slots quantity	Output slots quantity	Control board quantity
MIG-CL9008-A	9	11	1
Power supply	100-240V AC 50/60Hz		
Power consumption	Maximum 650W		
Operation temperature	0~45°C		
Product dimension (L x W x H)	482.6×355.0×430.5mm		
N.W.	18.85kg		

Including Accessories

Provided accessories :

- User Manual × 1
- DVI Cable × 2
- LAN × 2
- USB Memory × 1
- Router × 1
- Power Cable × 2
- Certificate × 1

SHENZHEN MAGNIMAGE TECHNOLOGY CO.,LTD

Add : F, B1k.F5, TCL International E City,#1001 Zhongshan Park Road,
Nanshan, Shenzhen, China
Tel : +86-755-8664 7651 Fax : +86-755-8664 7650

TECHVISIONLED S.r.l.

Via del Sersimone 8D
05100 Terni - Italy
Tel: +39 0744 - 400420 Fax: +39 0744 - 46120
info@techvisionled.com
www.techvisionled.com